

IA332 | IA520



Hardmount Washer-Extractor

FEATURES

- Rigid mounted, normal spin, up to 150G factor
- Stainless steel front panel
- Stainless steel drum and tub
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- High capacity water inlets
- Two large drain valves (Ø 76 mm)

OPTIONS

- Coin operated
- Stainless steel side panels
- Liquid soap connection and pumps
- Steam heating version
- ECO version: lower kW rating on request
- 3rd water inlet
- High capacity water inlets

CONTROL OPTIONS

- Evolis Elite – fully programmable and customizable cycles 7" touch screen for professional OPL operation
 - Up to 99 customizable cycles with step-by-step programming to support consistent wash processes, including hygiene-focused requirements where validated cycles are specified.
 - 36 language options, including a fully translated service menu.
 - Built-in Wi-Fi connectivity and USB import/export for cycles and machine configuration.
- Aries / Aries Elite – fully programmable control with 20 Pre-set programs and memory up to 99.
- Aries Micro – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)



SMART DRUM TECHNOLOGY

Extra mechanical action thanks to its cascading shape of the surface



EXTRA LARGE DOOR OPENING

For easy loading and unloading



HIGH CAPACITY WATER INLETS

For shorter wash cycles




TOUCH CONTROL

Multilingual user-friendly 7" touch control

YOUR SMART LAUNDRY PARTNER

		IA332	IA520
INNERDRUM			
Capacity 1:09	kg (lb)	37 (82)	58 (128)
Capacity 1:10	kg (lb)	33 (73)	52 (115)
Volume	litres	332	520
Diameter	mm	914	914
DRUM SPEED			
Wash	rpm	38	38
Extraction	rpm	540	440
G-FACTOR		150	100
HEATING			
Electricity	kW	27	40,6
Steam	bar	1 - 8	1 - 8
Hot water	°C	85	85
Sound pressure level	dB (A)	< 65	< 65
Water valves connection	BSP	¾"	1"
Water pressure	kPa	100-600	100-600
Rec. water pressure	kPa	300-500	300-500
Inlet flow capacity per inlet (at 4 bar)	l/min	59	59
Drain valve	outer Ø mm	2×76	2×76
Flow amount with drain valve	l/min	420	420
Steam valve connection	BSP	¾"	¾"
Steam pressure	kPa	100-800	100-800
DIMENSIONS			
Size H×W×D	mm	1500×1060×1030	1500×1060×1315
Net weight	kg	410	520
TRANSPORT DATA			
Packed H×W×D	mm	1700×1100×1100	1700×1100×1385
Gross weight	kg	520	570

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
IA332	798	750	1060	465	1500	145	1030	936	1413	1366	1326	528	120	318	482	1387	66	383	671	248	113
IA520	798	750	1060	465	1500	145	1315	1221	1413	1366	1326	528	120	318	482	1368	66	383	671	248	113
	W			H			D														

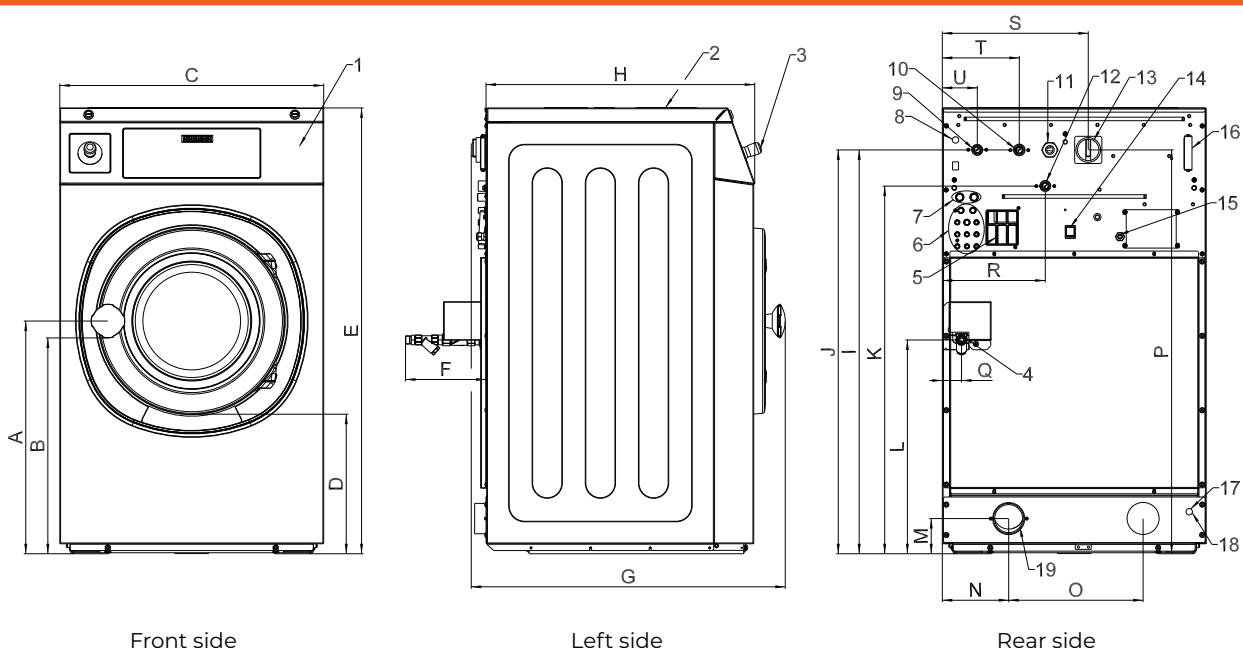

Front side

Left side

Rear side

- | | | |
|---------------------------|-------------------------------------|--|
| 1. Control panel | 8. Recycled water valve cable inlet | 15. Liquid soap pump electrical connection |
| 2. Soap dispenser | 9. Cold water inlet, soft | 16. Fuses |
| 3. Central STOP button | 10. Cold water inlet, hard | 17. Discharge water cable inlet |
| 4. Steam connection | 11. Electrical connection | 18. Drain valve or recycle valve -76 mm |
| 5. Air relieve | 12. Hot water inlet | 19. Drain valve - 76 mm |
| 6. Liquid soap connection | 13. Main switch | |
| 7. Recycled water inlet | 14. Heating change-over switch | |

Alliance Laundry Systems preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding. Consult your sales representative for availability.