



IY320

Softmount Washer-Extractor

FEATURES

- Freestanding, high spin washer
- Stainless steel front and top panel with black painted side panels
- Stainless steel drum and tub
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Double layer door glass for thermal insulation and operator protection
- High volume water inlets
- Large drain valve (Ø 76 mm)

OPTIONS

- Stainless steel cabinet
- Liquid soap connection and pumps
- 3rd water inlet
- 2nd drain valve (for faster drainage or water recycling)
- Steam heating
- Water sample tap

CONTROL OPTIONS

- Evolis Elite – fully programmable and customizable cycles 7" touch screen for professional OPL operation
- Up to 99 customizable cycles with step-by-step programming to support consistent wash processes, including hygiene-focused requirements where validated cycles are specified.
- 36 language options, including a fully translated service menu.
- On-screen service support with machine information, audit data, a built-in maintenance schedule, real-time service information and an Inputs/Outputs menu. Technicians can activate and check individual components directly from the control.
- Built-in Wi-Fi connectivity and USB import/export for cycles and machine configuration.



460G EXTRACTION SPEED

Less moisture for a more efficient drying process



CLOUD-BASED PLATFORM

to easily monitor your laundry everywhere and at any time



TOUCH CONTROL

Multilingual user-friendly 7" touch control

IY320

INNERDRUM

Capacity 1:09	kg (lb)	35 (77)
Capacity 1:10	kg (lb)	32 (71)
Volume	litres	320
Diameter	mm	860
DRUM SPEED		
Wash	rpm	40
Extraction	rpm	980
G-factor		460
HEATING		
Electricity	kW	21,9
Steam	bar	1-8

CONNECTION

Electrical connection

200-240 V 50/60 Hz 3 Ph
380-415 V 50/60 Hz 3 Ph
440 V 50/60 Hz 3 Ph


Water valves connection	BSP	3/4"
Recommended water pressure	bar	3-5
Water inlet flow capacity (at 4 bar)	l/min	20 (59)
Drain valve	outer Ø mm	76
Flow amount with drain valve	l/min	210
Steam valve connection	BSP	1/2"
Steam pressure	kPa	100-800
Sound pressure level (extraction)	dB (A)	< 72

DIMENSIONS

Size H×W×D	mm	1525×1080×1198
Net weight	kg	580

TRANSPORT DATA

Packed H×W×D	mm	1665×1135×1220
Gross weight	kg	625

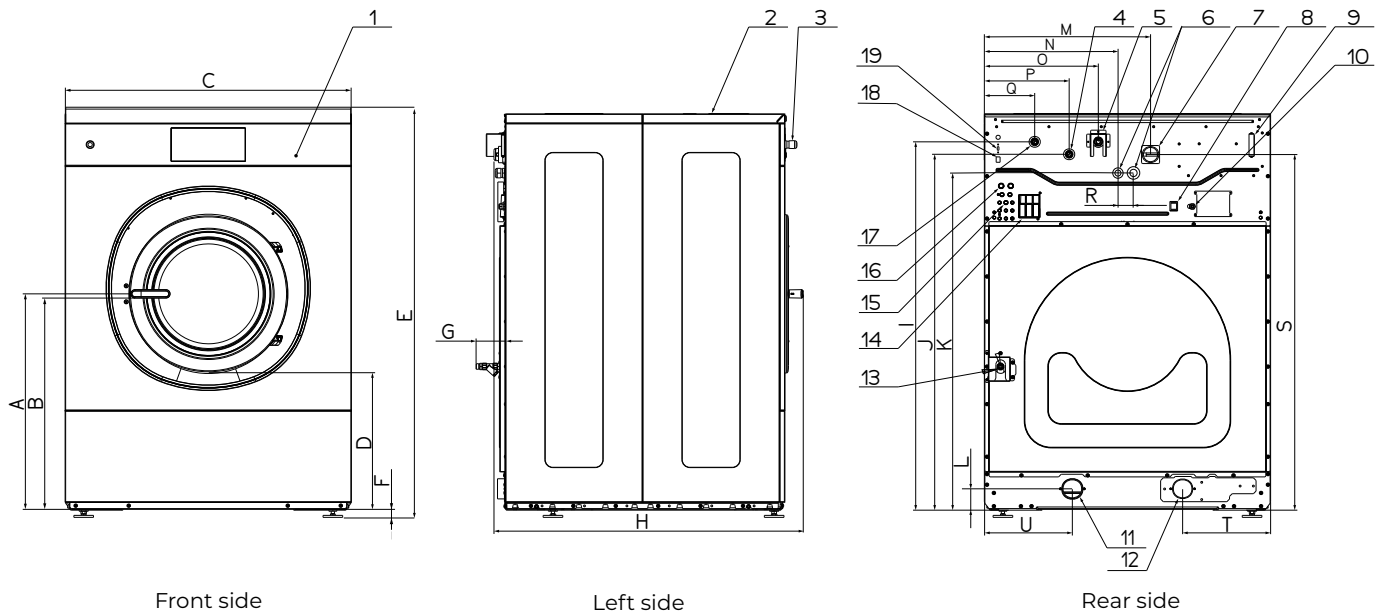

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
IY320	816	800	1080	516	1525	27	105	1198	1390	1342	1272	85	634	572	430	320	190	70	1342	332	332
	W			H			D														

- | | | |
|-------------------------------|---|-------------------------------|
| 1. Control panel | 10. Liquid soap pump electrical connection | 17. Cold water inlet, soft |
| 2. Soap dispenser | 11. Drain valve -3 in.[76 mm] | 18. PC programming connection |
| 3. Central stop button | 12. Drain valve or recycle valve -3 in.[76 mm]- on request only | 19. USB port |
| 4. Cold water inlet, hard | 13. Steam connection | |
| 5. Hot water inlet | 14. Air relieve | |
| 6. Electrical connection | 15. Liquid soap connection | |
| 7. Main switch | 16. Recycle water inlet | |
| 8. Heating change-over switch | | |
| 9. Fuses | | |

Alliance Laundry Systems preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding. Consult your sales representative for availability.