



ROLLER IRONER FOR ON-PREMISES LAUNDRY APPLICATIONS

I25-100

FEATURES

- Attractive design
- Standard finger guard protection
- When unattended, the device shuts off automatically
- Reduced number of mechanical and moving parts for a lower maintenance cost
- Homogeneous ironing pressure to ensure top ironing quality
- PID controlled temperature regulation offering better temperature distribution and reduced energy consumption
- Long-life heating elements
- Anodised extruded aluminium profile avoiding temperature drop and ensuring top ironing quality
- All vital components are easily accessible
- Start/stop pedal
- Standard NOMEX top cover sheet
- Backside of the basin is insulated with 25mm ceramic wool
 - no energy waste
 - quick temperature rise






OPTIONS

- Frequency inverter enabling variable ironing speed

I25-100

ROLLER DIAMETER (MM)	250
USEFUL ROLLER LENGTH (MM)	1000
IRONING CAPACITY (KG/H)	30 (rest humidity 10-15%)
SPEED (M/MIN)	3,9 (2-4*)
FUSES	
230/50/1	25 A
230/50/3	16 A
230/60/1	25 A
230/60/3	16 A
400/50/3	10 A
400/60/3	10 A
440/60/3	10 A
HEATING (KW)	5
TOTAL POWER (KW)	5,2
TRANSPORT DATA	
NET WEIGHT (KG)	110
GROSS WEIGHT (KG)	119
DIMENSIONS H X W X D (MM)	1005 x 1400 x 420
VOLUME (M³)	0,59
PACKING DIMENSIONS H X W X D (MM)	1150 x 1480 x 500
VOLUME (PACKED) (M³)	0,85

(*) Option: variable ironing speed - frequency inverter

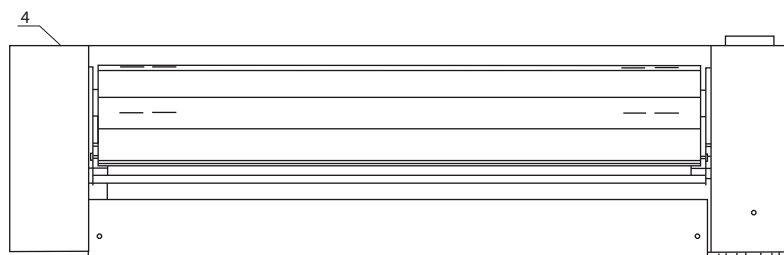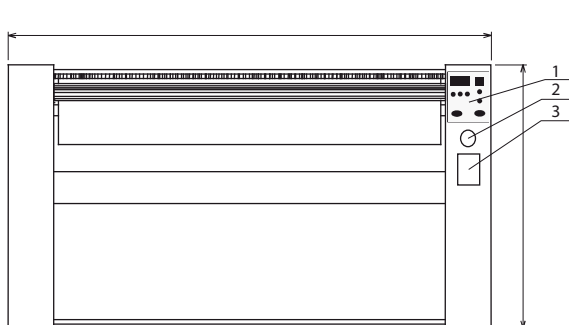

1. Control panel
2. Emergency stop button
3. Manual roller drive
4. Main switch and power supply