




ROLLER IRONER FOR ON-PREMISES LAUNDRY APPLICATIONS

I30-200AV




FEATURES

- Attractive design
- Standard finger guard protection
- When unattended, the device shuts off automatically
- Reduced number of mechanical and moving parts for a lower maintenance cost
- Homogeneous ironing pressure to ensure top ironing quality
- PID controlled temperature regulation offering better temperature distribution and reduced energy consumption
- Long-life heating elements
- Anodised extruded aluminium profile avoiding temperature drop and ensuring top ironing quality
- All vital components are easily accessible
- Standard NOMEX top cover sheet
- Backside of the basin is insulated with 25mm ceramic wool
 - no energy waste
 - quick temperature rise
- Frequency inverter enabling variable ironing speed
- Fan exhaust

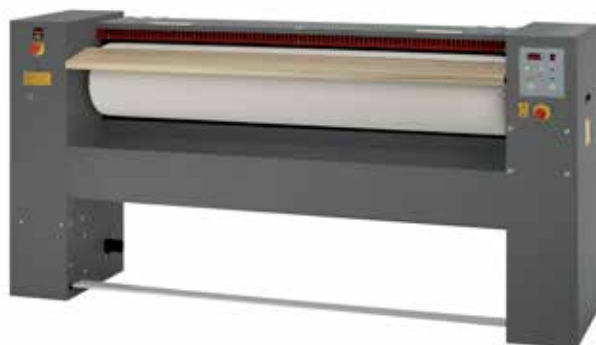

I30-200AV

ROLLER DIAMETER (MM)	290
USEFUL ROLLER LENGTH (MM)	2000
IRONING CAPACITY (KG/H)	52-79 (rest humidity 40-45%)
SPEED (M/MIN)	2,4
FUSES	
230/50/3	50 A
230/60/3	50 A
400/50/3	32 A
400/60/3	32 A
440/60/3	32 A
HEATING (KW)	16,8
TOTAL POWER (KW)	17,5
EXHAUST FAN (M ³ /H)	200 (**)
TRANSPORT DATA	
NET WEIGHT (KG)	294
GROSS WEIGHT (KG)	350
DIMENSIONS H X W X D (MM)	1100 x 2600 x 500
VOLUME (M ³)	1,43
PACKING DIMENSIONS H X W X D (MM)	1260 x 2690 x 590
VOLUME (PACKED) (M ³)	1,99

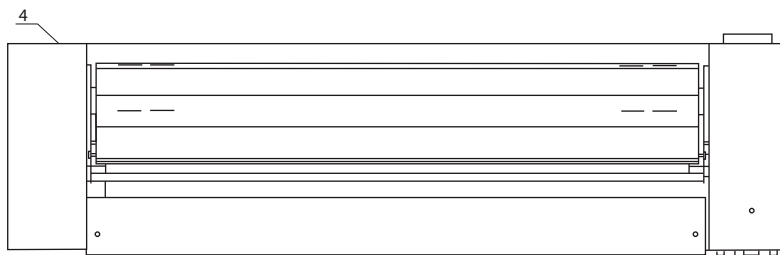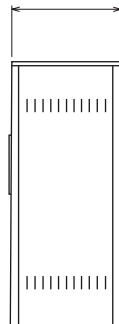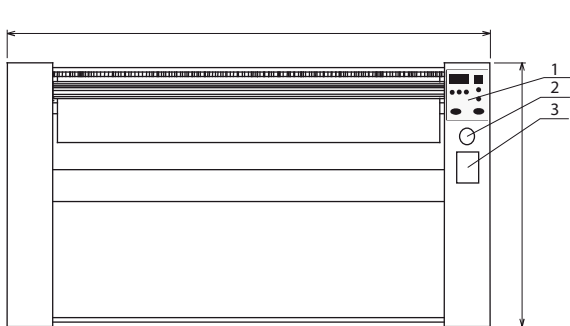

1. Control panel
2. Emergency stop button
3. Manual roller drive
4. Main switch and power supply